


Kovografitová kefa

01 464 090 160 170 001

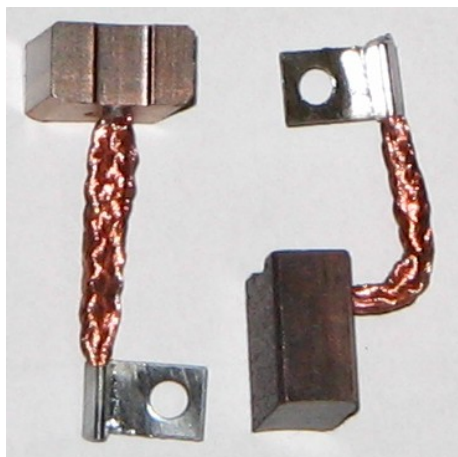

- | | | |
|------------|---|----------------------------|
| 01 | - | Interné značenie predajcu |
| 464 | - | Materiál MG464 |
| 090 | - | t = 9,0 mm |
| 160 | - | a = 16,0 mm |
| 170 | - | l = 17,0 mm |
| 001 | - | lanko = 30 mm
plus očko |

Použitie :

Štartér

Značka	Objemová hustota (min.hodn.) [g.cm ⁻³]	Merný el. odpor (str.hod.) [μΩ.m]	Tvrdość (str.hod.) [HRB Shore]	Odporúčaná hustota prúdu [A.cm ⁻²]	Obvodová rýchlosť (max.) [m.s ⁻¹]	Odporúčaná tlak na kefu [kPa]	Celk.úbytok napätia (max.) [V]	Súčiniteľ trenia (max.)	Obsah kovu [%]
MG 464	3,6	0,3	95 HR 10/40	18	20	30-40	1,5	0,2	63
Spúšťače 1,7 kW/12V									